

The EntOptLayout Cytoscape plug-in for the efficient visualization of major protein complexes in protein-protein interaction and signalling networks

Bence Ágg¹⁻³, Andrea Császár⁴, Máté Szalay-Bekó^{4,5}, Dániel V. Veres^{4,6}, Réka Mizsei⁷, Péter Ferdinandy^{1,3}, Péter Csermely^{4,*} and István A. Kovács⁸⁻¹⁰

¹Department of Pharmacology and Pharmacotherapy, Semmelweis University, Budapest, 1428 Hungary, ²Heart and Vascular Center, Semmelweis University, 1122 Budapest, Hungary, ³Pharmahungary Group, 6722 Szeged, Hungary, ⁴Department of Medical Chemistry, Semmelweis University, Budapest, 1428 Hungary, ⁵Earlham Institute, Norwich Research Park, Norwich, NR4 7UZ, UK, ⁶Turbine Ltd, Budapest, 1136 Hungary, ⁷Laboratory of Immunobiology, Department of Medical Oncology, Dana Farber Cancer Institute Boston, 02215 MA, USA, ⁸Network Science Institute, Northeastern University, 02115 Boston MA, USA, ⁹Center for Cancer Systems Biology (CCSB) and Department of Cancer Biology, Dana-Farber Cancer Institute, Boston, MA 02215, USA, ¹⁰Wigner Research Centre for Physics, Institute for Solid State Physics and Optics, Budapest, 1525 Hungary

*To whom correspondence should be addressed. E-mail: csermely.peter@med.semmelweis-univ.hu

Abstract

Motivation: Network visualizations of complex biological datasets usually result in 'hairball' images, which do not discriminate network modules.

Results: We present the EntOptLayout Cytoscape plug-in based on a recently developed network representation theory. The plug-in provides an efficient visualization of network modules, which represent major protein complexes in protein-protein interaction and signalling networks. Importantly, the tool gives a quality score of the network visualization by calculating the information loss between the input data and the visual representation showing a 3- to 25-fold improvement over conventional methods.

Availability: The plug-in (running on Windows, Linux, or Mac OS) and its tutorial (both in written and video forms) can be downloaded freely under the terms of the MIT license from: <http://apps.cytoscape.org/apps/entoptlayout>.

Contact: csermely.peter@med.semmelweis-univ.hu

Supplementary information: Supplementary data are available at Bioinformatics online.

1 Introduction

Informative network layouts enable us an intuitive, direct, qualitative understanding of complex systems preceding more elaborate quantitative studies (Hu and Nöllenburg, 2016; Miryala *et al.*, 2017). Recent contributions to network representation (like Dehmamy *et al.*, 2018; Muscoloni *et al.*, 2017; McInnes *et al.*, 2018; Muscoloni and Cannistraci, 2018) may provide additional approaches in the future. The widely used Cytoscape program has several useful network visualization tools (Shannon *et al.*, 2003). Modular organization is especially informative in interactomes and signalling networks, where network modules represent

major protein complexes offering an intuitive insight of their functions (Fessenden, 2017; King *et al.*, 2004; Szalay-Bekó *et al.*, 2012). However, existing network visualization methods lack an information theoretic foundation, and often result in 'hairball' images, which are unable to discriminate network modules. Here, we introduce the EntOptLayout Cytoscape plug-in, which uses the novel, relative entropy minimization-based network representation method we developed earlier (Kovács *et al.*, 2015). This method introduces network nodes as probability distributions and selects their best spatial representation, which is the hardest to distinguish from the input data. This is achieved by minimizing the relative entropy (also known as the Kullback-Leibler divergence) between the input data and their representation (Kovács *et al.*, 2015). The EntOptLayout plug-in is able to visualize network modules, highlighting major protein and signalling complexes.

2 Methods

The EntOptLayout Cytoscape plug-in initializes the layout using user provided or random coordinates by assigning a Gaussian probability distribution to each node. The relationships between the nodes are then captured by pairwise overlaps of the node distributions. For a network of n nodes and e edges, the runtime complexity of the plug-in is $\sim O(n^2)$ (Kovács *et al.*, 2015). The layout is updated in a user-selected frequency to see partial results, while an adjustable time limit is also available. EntOptLayout has several optimization features and user-friendly options as detailed in the Supplementary Data and its Tutorial. As an important option, EntOptLayout may raise the adjacency matrix on the square, which captures the interaction profile similarity of the nodes, and improves the detection of functional network modules even further. EntOptLayout is compatible with Cytoscape 3.7.1 and will be upgraded to its later versions. The source code of the plug-in can be accessed and support tickets can be issued here: <https://sourceforge.net/projects/entopt/>. Between January 2017 and February 2019 the plug-in was downloaded more than 4700 times and received only maximal, 5-star evaluations.

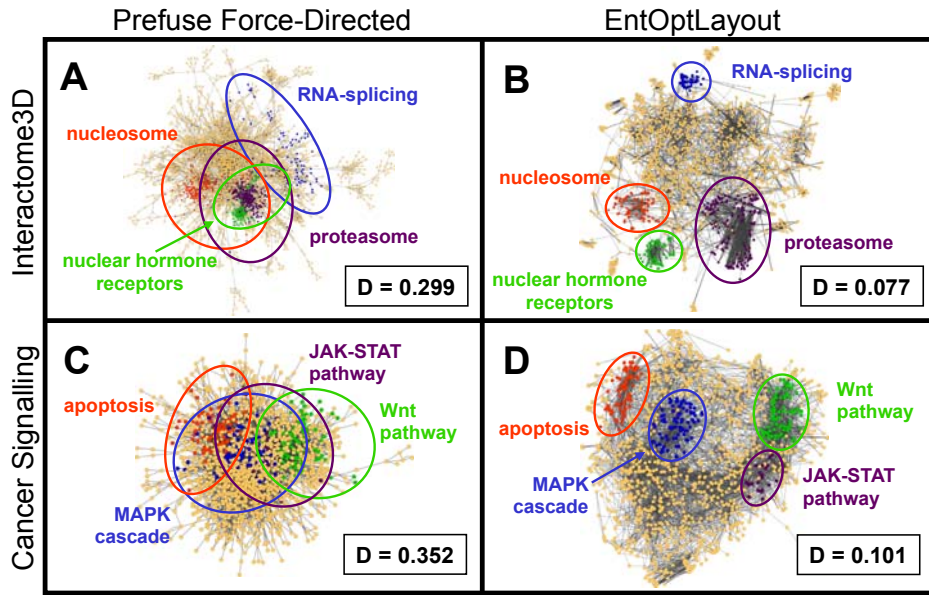


Fig. 1. Visualization of major protein complexes by the EntOptLayout Cytoscape plug-in. Coloured segments of the image represent various major protein complexes, showing the same, maximum 200 core nodes of the respective network module/community identified by the ModuLand Cytoscape plug-in (Szalay-Bekö *et al.*, 2012) as detailed in the legend of Supplementary Fig. S1. Panels **A** and **B** show the Interactome3D human protein-protein interaction network (Mosca *et al.*, 2013) visualized by the Cytoscape prefuse force-directed layout option alone or by the subsequent use of the EntOptLayout plug-in (switching on the square of the adjacency matrix, ignoring the square of the diagonal and performing consecutive optimizations for 10000 sec each for node position, node width, node position, node width and node position after a pre-ordering made by the prefuse force directed layout), respectively. “D” denotes the normalized information loss (relative entropy) of the layouts stored in the Network Table of the plug-in (in case of the Cytoscape layout its node positions were imported to the EntOptLayout plug-in, and only the node probability distributions were optimized keeping the node positions intact as described in Chapter 5 of the plug-in Tutorial). We note that the 10000 sec alternating position and node width optimization steps should be continued until the “D” value (the normalized information loss) of the layout is decreasing. “D” values are usually becoming minimal after 4 to 5 subsequent optimization steps. We also note that the use of the prefuse force-directed layout as a pre-ordering layout option before the use of the EntOptLayout shortens the required optimization time and allows the correct positioning of a few (usually 1 to 4) nodes, which became mis-positioned if this pre-ordering is not used. We recommend the use of the prefuse force-directed algorithm as pre-ordering, since the combination of only this algorithm with the EntOptLayout (but not 3 other Cytoscape layout options) resulted the correct positioning of all nodes (see Supplementary Figure S2). Panels **C** and **D** show the map of human cancer signalling (Cui *et al.*, 2007) visualized in the same way as shown in Panels **A** and **B**.

3 Results and Conclusion

Fig. 1A and 1B show the Interactome3D human protein-protein interaction network (Mosca *et al.*, 2013), visualized by the prefuse force-directed layout option of Cytoscape (Fig. 1A) or by the subsequent use of the EntOptLayout plug-in (Fig. 1B). While the core of the standard Cytoscape visualization was a typical ‘hairball’ image, where protein complexes had a large overlap, EntOptLayout using the ‘square of adjacency matrix’ option displayed the major protein complexes as distinct visual subgroups of the interactome. The same, or even larger differences were observed comparing various other standard Cytoscape and EntOptLayout images, and examining the Cytoscape example genetic interaction, human disease and 75 top node STRING Alzheimer’s disease-related interactome network, as well as weighted normal or heat shocked yeast BioGrid interactomes, the map of human cancer signalling, the Reactome human pathway network or network modules of benchmark graphs (see Fig. 1C-D; Supplementary Data; Supplementary Figures S1 through S9 and S12 through S14). In case of the affinity purification and 500 top node STRING network (Supplementary Figures S10 and S11) all the 4 visualizations (original, prefuse force-directed, spring embedded and EntOptLayout) showed significant overlaps of the modules. On the contrary, modules were clearly

distinct and well separated on the EntOptLayout image in case of all the 9 other networks listed above, while they showed significant overlaps when original layouts, spring embedded layouts, prefuse force-directed layouts or other layout options were examined (Figure 1; Supplementary Figures S1 through S9 and S12 through S14). Importantly, the normalized information loss (relative entropy, Kullback-Leibler divergence) between the input data and their layout representation showed a 3- to 25-fold improvement when the EntOptLayout method was compared to conventional methods in all cases examined (Fig. 1 and Supplementary Figures S1 through S14).

Interestingly, the edge structure of the spring embedded layout also showed dense clusters, which may imply a modular structure. However, this modular structure became covered if the diameter of the nodes was increased to a usual size. On the contrary, the same modular structure remained clearly identifiable when we used the EntOptLayout, since this latter algorithm gave a distinct localization of the modules. Such distinct localization could not be observed when using the spring embedded layout (Supplementary Figure S3).

In summary, we highlight the “pros” and “cons” of using the EntOptLayout network visualization Cytoscape plugin. The major advantage of using EntOptLayout is that it is the only algorithm, which gives a clear visual

discrimination of functional protein complexes in most networks. Better optical discrimination of protein complexes may help to discover the emergence of novel functions in changing interactomes or signalling networks during the propagation of a disease, cellular differentiation, wound healing, embryogenesis, etc. Importantly, the algorithm also minimizes the information loss during the visualization process, thus its image is not only functionally better but is also theoretically closer to an "optimal" image. It is a disadvantage of the EntOptLayout algorithm that it sometimes – mostly when using the 'square of adjacency matrix option' – gives aesthetically less pleasing images than other visualization algorithms, such as the widely used force-directed algorithm. This is due to the fact that the EntOptLayout does not optimize the image for the shortest length of edges or for crossing edges. An additional disadvantage of the EntOptLayout in case of large networks is the 10000 sec suggested running time of each optimization cycle as suggested in the legend of Fig 1. We are currently developing an upgrade of the algorithm which will allow shorter running times.

In conclusion, the use of the EntOptLayout plug-in in 9 out of 11 cases outperformed alternative Cytoscape layout options in the visual discrimination of network modules. This is especially important in human interactomes and signalling networks, providing an intuitive insight into the functional organization under healthy and pathological conditions.

Acknowledgements

The authors thank members of the LINK-Group (<http://linkgroup.hu>) for their discussions and help especially Daniel Abram for his contribution in the initial phase of the construction of the plug-in.

Funding

This work was supported by the Hungarian National Research, Development and Innovation Office [grant numbers: NVKP_16-1-2016-0017, BA; KH_17-125570, PF and K115378, PC] and by the Higher Education Institutional Excellence Programme of the Ministry of Human Capacities in Hungary, within the framework of the Therapeutic Development [PF] and Molecular Biology [PC] thematic programmes of the Semmelweis University.

Conflict of interest: PC and VD are founders, VD is CMO of Turbine Ltd. PF is founder and CEO and BA is an employee of Pharmahungary, a Group of R&D companies.

References

- Cui,Q., *et al.* (2007) A map of human cancer signaling. *Mol. Syst. Biol.* **3**, 152 (downloaded: 17.07.22).
- Dehmamy,N. Milanlouei,S. Barabási,A-L. (2018) A structural transition in physical networks. *Nature* **563**, 676-680.
- Fessenden,M. (2017) Protein maps chart the causes of disease. *Nature* **549**, 293-295.
- Hu,Y., Nöllenburg, M. (eds.) (2016) *Graph Drawing and Network Visualization: 24th International Symposium, Revised Selected Papers*. Springer, Heidelberg, Germany.
- King,A.D., Przulj,N., Jurisica,I. (2004) Protein complex prediction via cost-based clustering. *Bioinformatics* **20**, 3013-3020.
- Kovács,I.A., *et al.* (2015) A unified data representation theory for network visualization, ordering and coarse-graining. *Sci. Rep.*, **5**, 13786.
- McInnes,L. Healy,J., Melville, J. (2018) UMAP: Uniform Manifold Approximation and Projection for dimension reduction. arxiv preprint 1802.03426.
- Miryal,S.K., Anbarasu,A., Ramaiah,S. (2017) Discerning molecular interactions: A comprehensive review on biomolecular interaction databases and network analysis tools. *Gene* **642**, 84-94.
- Mosca,R., Céol,A., Aloy,P. (2013) Interactome3D: adding structural details to protein networks. *Nature Meth.* **10**, 47-53. (downloaded on 17.03.05)
- Muscoloni,A., Cansitraci,C.V. (2018) Minimum curvilinear automata with similarity attachment for network embedding and link prediction in the hyperbolic space. arxiv preprint 1802.01183.
- Muscoloni,A. *et al.* (2017) Machine learning meets complex networks via coalescent embedding in the hyperbolic space. *Nat. Comm.*, **8**, 1615.
- Shannon, P., *et al.* (2003) Cytoscape: a software environment for integrated models of biomolecular interaction networks. *Genome Res.* **13**, 2498-5204.
- Szalay-Bekő,M., *et al.* (2012) ModuLand plug-in for Cytoscape: determination of hierarchical layers of overlapping network modules and community centrality. *Bioinformatics* **15**, 2202-2204.